
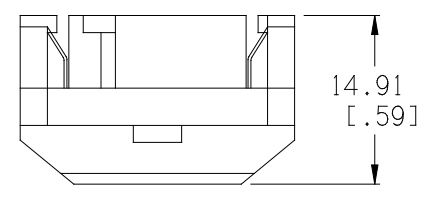



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

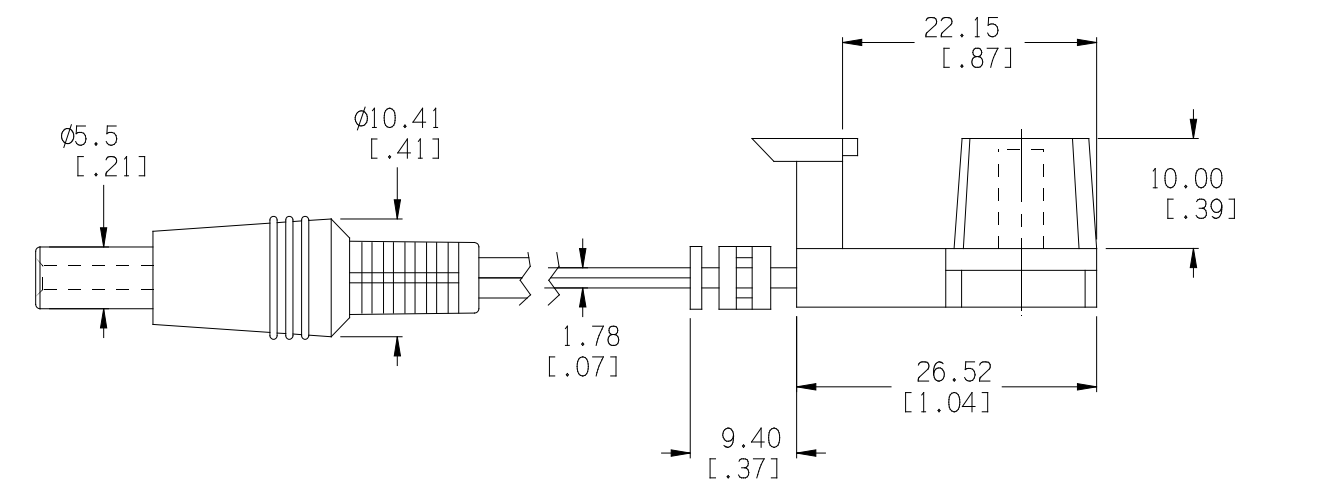

HOUSING: BLACK PLASTIC  
 CORD: UL2468, 300V, 80°C, 22-24AWG  
 PASSES UL FLAME TEST VW-1  
 FILE NO. E11278 OR EQUAL  
 CENTER IS POSITIVE CONTACT  
 DC MOLDED PLUG: 2.5mm X 5.5mm

Tolerance (Inches)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
Decimal	±.5 (.020)	Scale Drawn By B.S. Approved By T.B.
Fractional	± .8 (.030)	Title LEAD ACID BATTERY CLIP TO DC MOLDED PLUG WITH 2.5 DC PLUG
Angular	± 3°	Date 3/21/08 Drawing Number ZA5350-2.5