PANDUIT PART NO.	LENGTH △B	WEIGHT	MOUNTING HOLE DIM'S		
			"X"	"Y"	"Z"
T45B**8	96.00 IN ±.18 IN.	1.60 LB/96 IN. (723.8 G/2438 MM)	1.47 (37.3)	3.91 (99.3)	8.00 (203.2)
T45B**10	120.00 IN ±.18 IN.	2.00 LB/120 IN. (904.8 G/3048 MM)	1.47 (37.3)	3.91 (99.3)	8.00 (203.2)
T45B**2	78.74 ±.18 (2000 ±4.5)	1.31 LB/78.74 IN. (593.7 G/2000 MM)	1.47 (37.3)	3.28 (83.3)	8.00 (203.2)
T45B**3	118.11 ±.18 (3000 ±4.5)	1.96 LB/118.1 IN. (890.5 g/3000 mm)	1.47 (37.3)	2.97 (75.4)	8.00 (203.2)

△A

.175 DIA. (4.4) REF

"X" REF

"Z" REF

"Y" REF
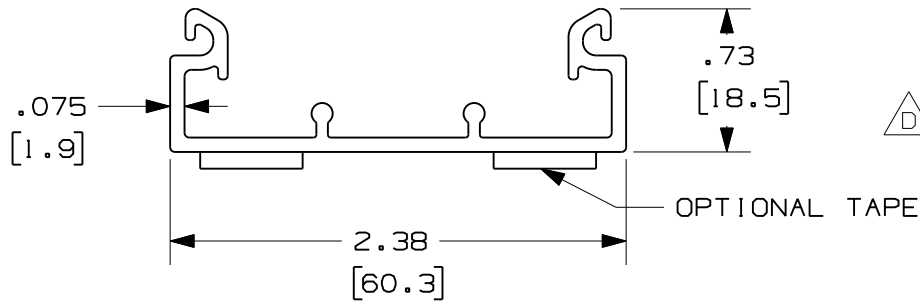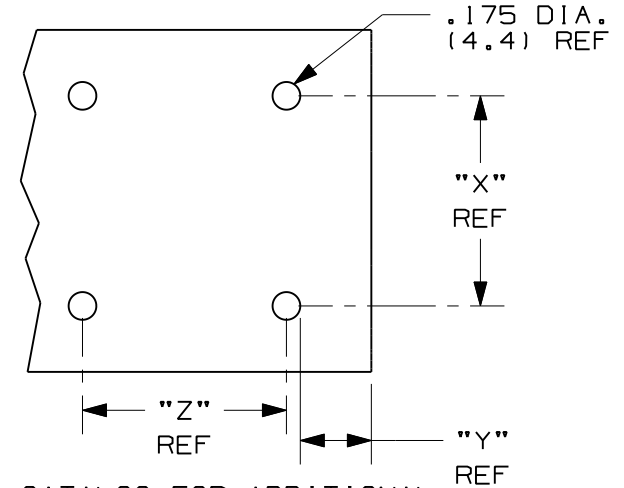
NOTES:

** 1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLORS AND OR PACKAGE QUANTITY.
2. THE T45B IS USED WITH THE T45C RACEWAY COVER.
3. DIMENSIONS IN PARENTHESIS ARE IN METRIC.
△D △C 4. REMOVED
5. PART IS DESIGNED TO SUPPORT MAXIMUM WEIGHT ON A CLEAN, DRY, SMOOTH SURFACE. THE SURFACE MUST BE PROPERLY PREPARED IN ACCORDANCE WITH PANDUIT RECOMMENDATIONS.
6. TO APPLY PART:
a. REMOVE PROTECTIVE LINER.
b. PLACE PART IN DESIRED LOCATION.
c. APPLY PRESSURE TO FLAT SURFACE OF PART.

.73 [18.5]

.075 [1.9]

OPTIONAL TAPE

2.38 [60.3]

CAD FILENAME/LAYERS: D36975EC_DC_T45B_OOC.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

T-45 BASE (T45B) CUSTOMER DRAWING

REV	DATE	BY	CHK	DESCRIPTION	ECN	CHK	CUST	SUP
2	10-05-08	BDK	RMHI	D. REMOVED NOTE 4	36975-65	RTFI	RTFI	
-	-------	--	--	C. REV'D NOTE 4: ADDED METRIC LENGTHS	36975-65	--	--	
1	06-19-00	JHNU	HIW	B. REV'D TOL.: ±.18 WAS ±.13. A. ADDED LENGTHS IN INCHES	36975-65	HIW	HIW	
R	10-28-99	RABO	HIW	RELEASED TO PRODUCTION	36975-65	HIW	HIW	

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ±   (.XXX) ±
(.XX) ±.03(.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: RABO
MAT'L: PVC
SCALE: NONE

DATE: 10-28-99

CHECKED BY: BKR

DRAWING NO. 36975-65

DWG SIZE: A