


REV. 1 8/13/98

COIL: @ 25°C	
RESISTANCE	1560 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
MUST RELEASE	8.0 VDC MAX, 1.37 VDC MIN

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.  
 RELEASE TIME 1.5 MS MAX.  
 CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET

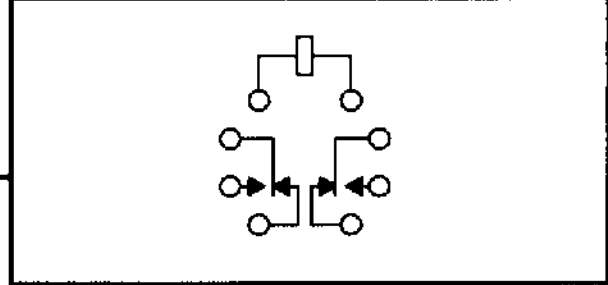

CONTACT RATING: LOW LEVEL TO 1A  
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 7/10/98 CK. 3/13/98



CUST. C. I. I.  
 CUST. NO. COTS STD.

TYPE PRMA RELAY

PRMAC-26X